

**QUALIKO**

PROFESSIONAL LIGHT COMPONENTS

2022

# ALASKA EVO

**QUALIKO**  
PROFESSIONAL LIGHT COMPONENTS srl



Lampioni LED • LED Street Lights





| Type          | Part N°      | Dimensions<br>(mm) | Weight<br>kg | Input<br>(V) | Flux<br>(Lm) | °Kelvin | Power<br>(W max) | Surge<br>protection | Pole Ø<br>(mm) | Packing box<br>dimensions (mm) | Packing box<br>Weight (kg) |
|---------------|--------------|--------------------|--------------|--------------|--------------|---------|------------------|---------------------|----------------|--------------------------------|----------------------------|
| ALASKA EVO 40 | BLT107EVO40G | 414X125x90h        | 1,9          | 100÷240      | 5152 Lm      | 4000°   | 40               | 15KV                | 45+67          | 460x230x140                    | 2,3                        |

 **LED street light**

- Lampione stradale a Led asse orizzontale
- Power factor >0,95
- Involucro IP67 verniciato con epossidica grigia
- Temperatura ambiente operativa -40°C ÷ +50°C

 **LED street light**

- Led street light horizontal axis
- Power factor >0,95- IP67 case and epoxy grey painting
- Working range: -40°C ÷ +50°C

 **Street light LED**



- Led Straßenleuchte auf horizontale Achse
- Leistungsfaktor: >0,95
- Graue Epoxy-Lackierung – IP67
- Betriebstemperatur: -40°C ÷ +50°C

 **LED street light**

- Lampadaire à Led axe horizontal
- Facteur de puissance: >0,95
- Finition avec du vernis epoxy gris – IP67
- Température de fonctionnement: -40°C ÷ +50°C

 **LED street light**

- Alumbrado public Led, eje horizontal
- Factor de potencia: >0,95
- Caja IP67 y pintura de epoxy gris
- Temperatura de funcionamiento: -40°C ÷ +50°C

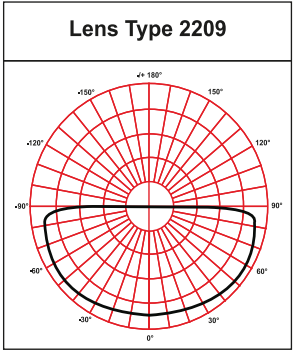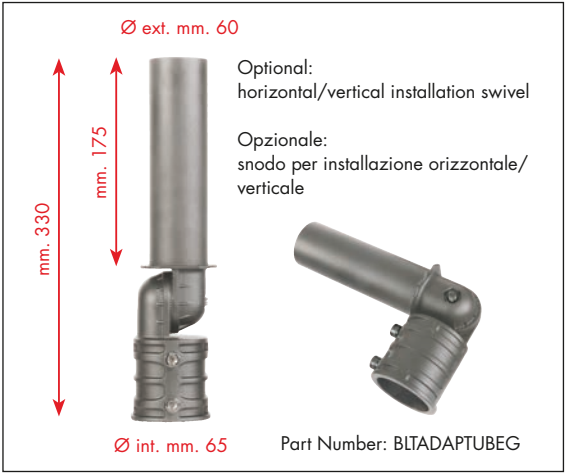



Lampioni LED • LED Street Lights



| Type         | Part N°      | Dimensions (mm) | Weight kg | Input (V) | Flux (Lm) | *Kelvin | Power (W max) | Surge protection | Pole Ø (mm) | Packing box dimensions (mm) | Packing box Weight (kg) |
|--------------|--------------|-----------------|-----------|-----------|-----------|---------|---------------|------------------|-------------|-----------------------------|-------------------------|
| TEXAS EVO 60 | BLT111EVO40G | 435X190x80h     | 2,7       | 100÷240   | 6483 Lm   | 4000°   | 60            | 15KV             | 57÷63       | 490x260x150                 | 3,30                    |

 **LED street light**

- Lampione stradale a Led asse orizzontale
- Power factor >0,95
- Involucro IP67 verniciato con epossidica grigia
- Temperatura ambiente operativa -40°C ÷ +50°C

 **LED street light**

- Led street light horizontal axis
- Power factor >0,95- IP67 case and epoxy grey painting
- Working range: -40°C ÷ +50°C

 **Street light LED**

- Led Straßenleuchte auf horizontale Achse
- Leistungsfaktor: >0,95
- Graue Epoxy-Lackierung – IP67
- Betriebstemperatur: -40°C ÷ +50°C

 **LED street light**

- Lampadaire à Led axe horizontal
- Facteur de puissance: >0,95
- Finition avec du vernis epoxy gris – IP67
- Température de fonctionnement: -40°C ÷ +50°C

 **LED street light**

- Alumbrado public Led, eje horizontal
- Factor de potencia: >0,95
- Caja IP67 y pintura de epoxy gris
- Temperatura de funcionamiento: -40°C ÷ +50°C

