

2019

QUALLIX

PROFESSIONAL LIGHT COMPONENTS

FRAMELESS EVO


60x60

QUALIKO
PROFESSIONAL LIGHT COMPONENTS srl

Pannelli LED • LED panels

FRAMELESS EVO 60x60 Pannelli LED • LED panels

QUALIKO_{sr}

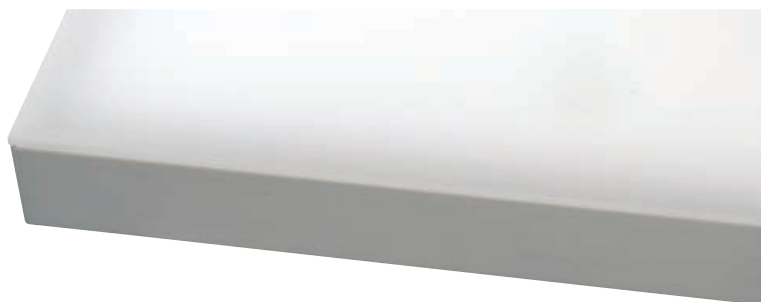

CE EMC IP52 RoHS


Standard: for modular ceilings



Molle BPLKITSRING




Optional: ceiling kit



Part N°: BPLKITCEIL1B




Optional: suspension kit



Part N°: BPLKIT4X150C



Optional: wall kit




Part N°: BPLKITWALLOB



Optional: closed ceiling kit (60x60 only)



Part N°: BPLKITBOX00A Aluminium
Part N°: BPLKITBOX00B White



Type	Part N°	Dimensions (mm)	Input (V)	Colour	°Kelvin	Lumen	Power (W)	Packing box dimensions (mm)	Weight (kg)
60x60 FRAMELESS DRI CW	BPL6060FRDRC	595x595x18h	200+240	Cool White	6000°K	4200	42	650x650x40h	4,2
60x60 FRAMELESS DRI NW	BPL6060FRDRN	595x595x18h	200+240	Natural White	4200°K	4100	42	650x650x40h	4,2
60x60 FRAMELESS DRI WW	BPL6060FRDRW	595x595x18h	200+240	Warm White	3000°K	3800	42	650x650x40h	4,2

Pannelli FRAMELESS

- Struttura in alluminio senza cornice
- I pannelli si possono affiancare al fine di creare intere pareti senza interruzioni
- Adatto per sostituire incassi standard per tubi fluo
- Grande omogeneità luminosa - Spessore 18 mm
- Funziona in bassa tensione con trasformatore 1A incluso
- Consumo limitato

FRAMELESS panel

- Aluminum body without frame
- Panels can be installed side by side without interruptions
- Suitable for replacing standard fixtures for fluo tubes
- Great homogeneity of light - Thickness 18 mm
- Safety low voltage with 1A drivers included
- Limited consumption

Panelen FRAMELESS


- Struktur aus Aluminium ohne Rahme
- Die Led-Panelen können verbunden werden, um ganze Wände ohne Unterbrechung und mit großer Farb-und Helligkeitsverteilung zu erstellen
- Für direkten Ersatz von standard Leuchtstoffröhren geeignet
- Groß Homogenität des Lichts - Dicke 18 mm
- 1A Led-Treiber dabei geliefert
- Begrenzter Verbrauch

Panneaux LED FRAMELESS

- Structure en aluminium sans encadrement
- Les panneaux peuvent être assemblés afin de créer des parois sans interruptions
- Approprié pour le remplacement des encastrables standard à tubes fluo
- Luminosité très homogène - Épaisseur 18 mm
- Il marche en basse tension avec un convertisseur 1A livré avec
- Consommation limitée

Paneles sin marco

- Cuerpo de aluminio sin marco
- Los paneles pueden instalarse uno al lado del otro sin interrupciones
- Adecuado para remplazo directo de lampara estandar con tubos de fluorescencia
- Excelente homogeneidad luminica - Grosor 18 mm
- Alta seguridad por funcionamiento a baja tension, con drivers especificos de 1A (incluido)
- Bajo consume



Versione DALI disponibile a richiesta
DALI version available on request