

QUALIKO
PROFESSIONAL LIGHT COMPONENTS

2020

ARAGON FLAT



QUALIKO^{srl}
PROFESSIONAL LIGHT COMPONENTS



Incassi Gypsolyte • Gypsolyte fixtures

ARAGON FLAT Incassi Gypsolyte • Gypsolyte fixtures

QUALIKO

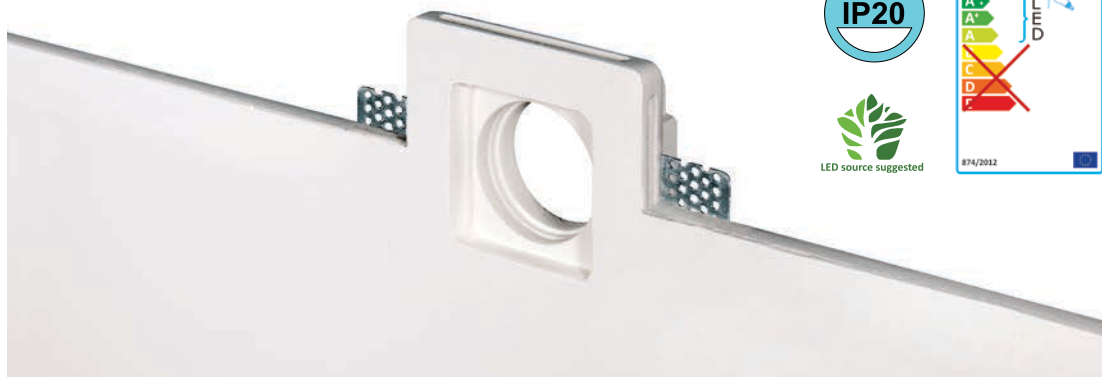

CE RoHS

Type	Part n°	Dimensions mm	Standard	Colour	mm	Packing box dimensions (mm)	Packing box (kg)
ARAGON FLAT Q1B	B9222G050Q1B	100x100x27h	MR16	White	105x105	150x150x80	0,40

Vedere pagina 184 per i kit che includono la lampadina LED - See page 184 for kits including LED lamp

Incasso in Gypsolyte per controsoffitti (per moduli LED)

- Incasso invisibile per controsoffitti
- Dopo aver rasato a gesso il controsoffitto, l'incasso risulta parte integrante del soffitto stesso e può essere tinteggiato
- Apertura per installazione 105x105 mm.
- Adatto a moduli LED standard MR16

Gypsolyte fitting for counter ceiling (for LED modules)

- Invisible fitting for counter ceilings
- Once the counter ceiling is finished with smoothing plaster, the fitting is almost invisible and can be painted together with the ceiling
- Installation hole mm 105x105
- Suitable for standard MR16 LED modules

Einbaustrahler aus Gypsolyte für Unterdecken (für Led-Modulen geeignet)



- Unsichtbare Einbaustrahler für Unterdecken
- Sobald die Unterdecke durch Gips glatt gemacht ist, wird der Einbaustrahler fast unsichtbar und kann zusammen mit der Unterdecke gemalt werden
- Montageöffnung 105x105 mm.
- Für Standard MR16 LED-Module geeignet

Encastrable en Gypsolyte pour plafond (pour modules à LED)

- Encastrable invisible pour faux plafond
- Après avoir lissé le faux-plafond, le boîtier encastrable devient partie intégrante du faux-plafond lui même et peut être peint
- Ouverture dans le plafond pour l'installation: 105x105 mm.
- Adapté aux modules LED MR16 standard

Cazoleta para falso techo (para módulos de LED) in Gypsolyte

- Cazoleta para falso techo Gypsolyte (para módulos de LED)
- Cazoleta invisible para falsos techos
- Una vez terminado el falso techo con yeso la carcasa es casi invisible y puede ser pintado junto con el techo
- Medidas del orificio para la instalación 105x105 mm.
- Apropriado para módulos estándar de LED MR16



Optional Class II GU10 lampholder
Part N°: BPORTGU1020N



Optional LED bulb GU10:
A43QLH5M270W (7W - 2700K)
A43QLH5M300W (7W - 3000K)
A43QLH5M400W (7W - 4000K)