

QUALIKO


PROFESSIONAL LIGHT COMPONENTS

2202

LED PANEL DRI

60x60

QUALIKO
PROFESSIONAL LIGHT COMPONENTS srl

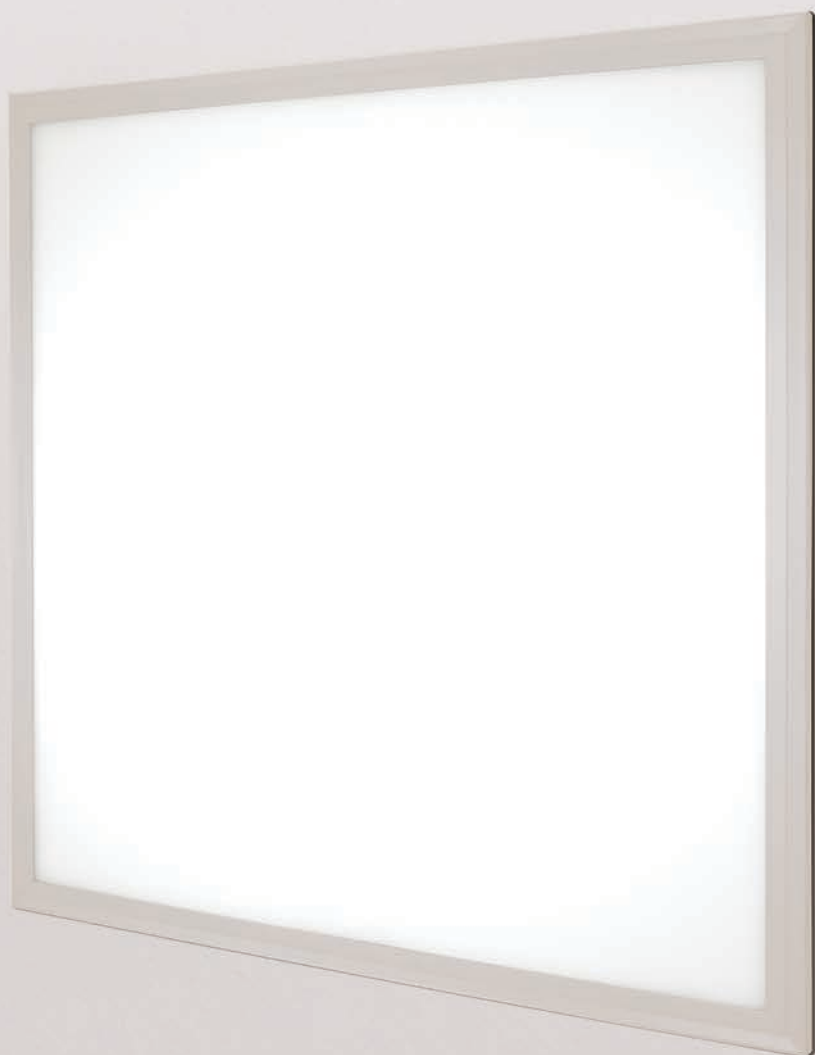

Pannelli LED • LED panels

LED PANEL DRI 60x60 Pannelli LED • LED panels

QUALIKO[®]




CE EMC IP20 RoHS


Optional: suspension kit - Part N°: BPLKIT4X150C



Optional: ceiling kit - Part N°: BPLKITCEIL1B



Optional: wall kit - Part N°: BPLKITWALL0B

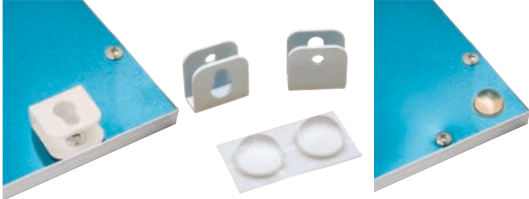

Optional: spring kit Part N°: BPLKITSPRING



Optional: closed ceiling kit (60x60 only)
Part N°: BPLKITBOX00B White



Type	Part N°	Dimensions (mm)	Input (V)	Colour	Frame colour	°Kelvin	Lumen	Power (W)	Packing box dimensions (mm)	Weight (kg)
60x60 CW	BPL6060DRICB	595x595x10,5h	200±240	Cool White	White	6000°K	3918	36	670x620x30h	3,7
60x60 NW	BPL6060DRINB	595x595x10,5h	200±240	Natural White	White	4200°K	3407	36	670x620x30h	3,7
60x60 WW	BPL6060DRIWB	595x595x10,5h	200±240	Warm White	White	3000°K	2895	36	670x620x30h	3,7
60x60 UGR NW	BPL60UGDRNB	595x595x10,5h	200±240	Natural White	White	4200°K	3855	36	670x620x30h	3,7

🇮🇹 Pannello LED 60x60 DRI

- Cornice e struttura in alluminio
- Adatto per sostituire incassi standard per tubi fluo
- Grande omogeneità luminosa
- Funziona in bassa tensione con trasformatore 1A incluso
- Versione UGR <19 disponibile

🇬🇧 LED panel 60x60 DRI

- Structure and frame in aluminum
- Suitable for replacing standard fixtures for fluo tubes
- Great homogeneity of light
- Safety low voltage with 1A drivers included
- UGR <19 version available

🇩🇪 LED-Tafel 60x60 DRI

- Rahme und Körper aus Aluminium
- Für direkten Ersatz von standard Leuchtstoffröhren geeignet
- Groß Homogenität des Lichts- Dicke 10,5 mm
- 1A Led-Treiber dabei geliefert
- Ausvührung UGR <19 verfügbar


🇫🇷 Panneau LED 60x60 DRI

- Encadrement et corps en aluminium
- Approprié pour le remplacement des encastrables standard à tubes fluo
- Luminosité très homogène

- Il marche en basse tension avec un convertisseur 1A livré avec
- Version UGR <19 disponible

🇪🇸 Panel LED 60x60 DRI

- Estructura y marco de aluminio
- Adecuado para remplazo directo de lampara estandar con tubos de fluorescencia
- Excelente homogeneidad luminica
- Alta seguridad por funcionamiento a baja tension, con drivers especificos de 1A (incluido)
- Versión UGR <19 disponible



Versione DALI disponibile a richiesta
DALI version available on request